
ROLSON®
WIRES & CABLES


Product Catalogue

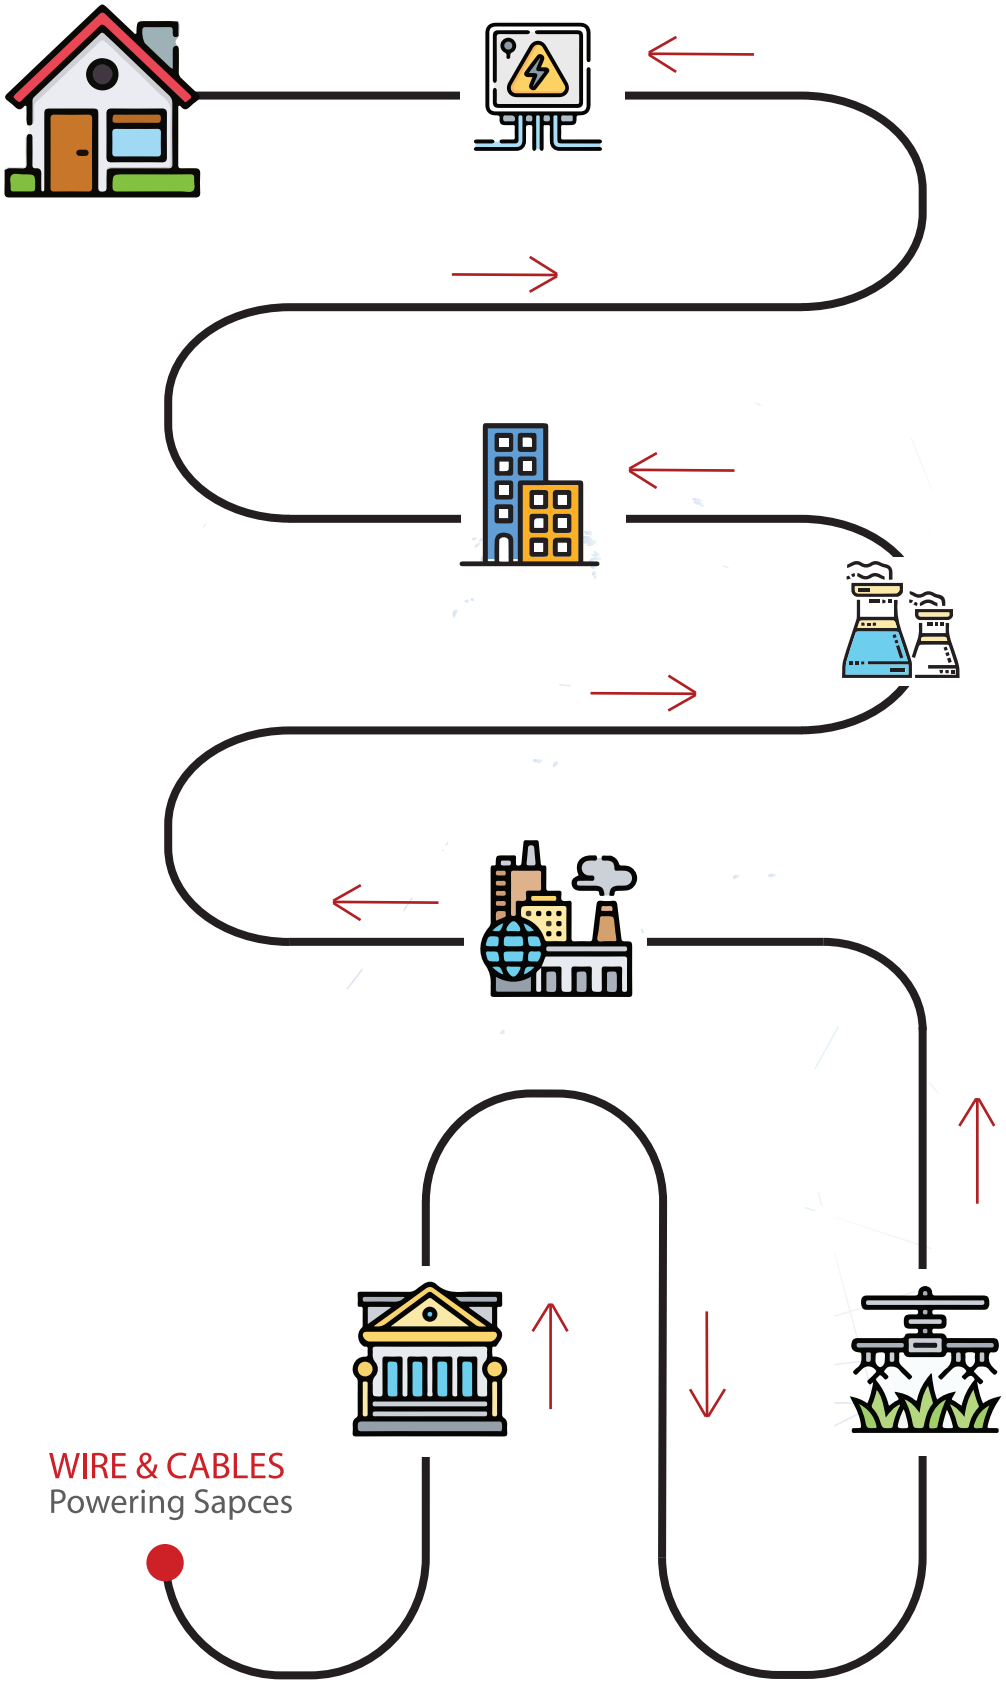


ROLSON®
WIRES & CABLES

IS : 694
CM/L - 7500269814

AUTO CABLES



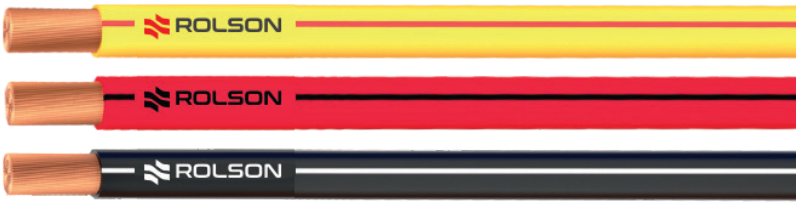

Cable Standard

According to DIN 72551-6 & ISO 6722 B

JIS C 3406, JASO D 611/608, IS 2465,
BS 6862 : PART 1

Cable Features

- Excellent flexibility
- Rolson Auto cables is impervious to water, petrol, diesel, acids, engine and lubricating oils and grease resistant
- High mechanical strength
- Excellent flame retardant properties
- Excellent mechanical & electrical properties

Application

These cables are used as original equipments for wiring automobiles and in the auto harnesses

Standard Packing

Coils 100, 200, 500 and 1000m

Conductor : Flexible Bare Copper Wire
Insulation : Pvc Insulation
Cables Type : FLRY-A and FLRY-B
Colour : Blue, Black, Brown, Grey, Orange, Pink, Red, Violet, White, Green, Yellow, Yellow / Green, Lining Strip Colour Also and as per Customer Requirement
Temperature : 20°c to 105°c

Conductor Size (sqmm)	No. of Wires	Wire Size (mm)	Bunch Copper Diameter (mm)	Conductor Resistance at 20 C Max	Minimum Insulation Thickness (mm)	Outer Diameter (mm)	Outer Diameter Max. (mm)
0.35	12	0.20	0.90	52.00	0.20	1.20	1.40
0.50	16	0.20	1.00	39.00	0.22	1.40	1.60
0.75	24	0.20	1.20	26.00	0.24	1.80	1.90
1.00	32	0.20	1.35	19.50	0.24	1.90	2.10
1.50	30	0.25	1.70	13.30	0.24	2.30	2.40
2.50	50	0.25	2.20	7.98	0.28	2.90	3.00
4.00	56	0.30	2.75	4.95	0.32	3.40	3.70
6.00	84	0.30	3.30	3.30	0.32	4.00	4.30

Note:The number of wires and diameter mentioned in the table are approximate and nominal; however they shall meet the requirements of conductor resistance as per standards.In view of continuous improvements in our design and process, the information, Dimensions and specifications given herein are subject to change without notice.

ROLSON®
WIRES & CABLES

Mfgby : **Rolson Industries,** Plot No C-49, Gat No 1328/1329,
Pune- Saswad Road, Wadki, Pune - 412308

info@rolson.in www.rolson.in

Follow us on